


IMPORTANT NOTE:

This installation requires 2 people.

PRODUCT NEEDED:

- (1) UHD TV - Target DCPI 3050
- (1) OLED TV -Target DCPI AX3050
- (1) SJ4 Sound bar & Sub woofer

ITEMS / TOOLS NEEDED:

- (1) Phillips Screwdriver
- (1) Tape Measure
- (8) TV Mounting Screws
- (8) TV Mounting Washers
- (1) Target Standard Price Bar
Target DPCI 004388794
- (2) Target Price Inserts
- (2) Target TV Mounting Bracket
Assembly

KIT INCLUDES:

- (1) LG Header Panel
- (6) Spanner Locking Brackets
- (10) Pan Phillips Machine Screws
#10 - 24 x 1/2"
- (6) Hex Kep Nut #10 - 24
- (1) Angled Spanner Bar - UHD TV
- (4) TV Mounting Brackets
- (1) Price Holders
- (2) M4 Washers
- (2) 7x18mm M4 Screws
- (1) Top Back Panel
- (1) OLED Header Spanner Bar
- (1) Spanner Bar - OLED TV
- (4) Xmas Tree Clips
- (1) Base Plate Cover
- (1) Sub Woofer Mounting Plate
- (2) Pan Phillips Machine Screws
#10 - 24x1"

- (2) Wing Nuts #10-24
- (1) Sound Bar Shelf
- (4) Pan Phillips Head Tapping
Screws Type AB #6 x 1/2"
- (1) Media Shelf Assembly:
 - (1) HDMI Cable
 - (1) 3.5mm Audio Cable
 - (1) Power Extension Cable
 - (1) LG Header Power Adapter
- (1) Cable Twist Tie
- (1) Sub Woofer Security Bracket
- (1) Lower Back Panel
- (2) Pan Phillips Machine Screws
1/4" - 20 x 2.50"
- (1) UHD TV Graphic Insert
- (1) OLED TV Header Panel

Notch Locations



(Notch location # is counted from the bottom to the top.)

1. Install the LG Header Panel

1A. Prepare two ladders as shown and clear out any previously installed displays.



1B. Locate the (1) header panel and lift it towards the top of the gondola.




1C. Hook the header panel onto the top notches (76 from the bottom)



1D. Locate and hook (2) spanner locking brackets on each side of the header.



1E. Locate (2) Pan Phillips machine screw #10 - 24x1/2" and (2) Hex kep nut #10 - 24

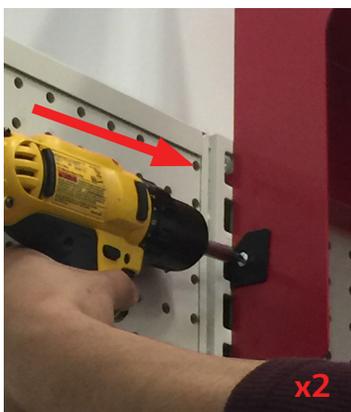

1F. Tighten the nut and screw into place on each side so the bracket is securely in place.




2. Installing the Top TV

2A. Pull out the electrical plug out from under the header so that it can be plugged in later.



2D. Locate (2) spanner locking brackets (2) Pan Phillips machine screw #10 - 24x1/2" and (2) Hex kep nuts #10 - 24 and tighten the bracket securely in place.

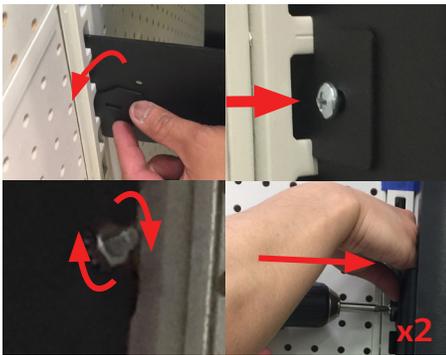

2G. Line up the brackets so that the (4) screws and (4) washers line up with the bracket holes.



2B. Locate the (1) angled spanner bar for top UHD TV - Target DPCI 3050.




2E. Locate (4) TV Mounting screws and (4) Washers included with the UHD TV - Target DPCI 3050




2H. Make sure to use the correct length screw as to not damage the TV.



2C. Install the top hook of the spanner bar on Notch 65 (from the bottom)

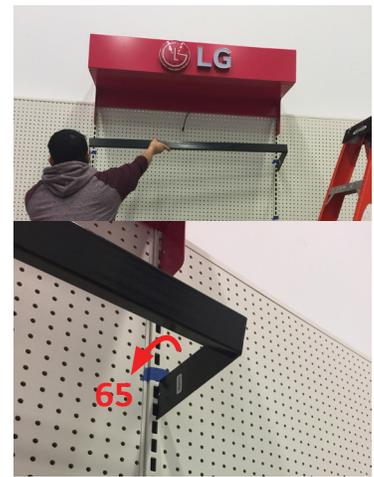

2F. Place the (2) TV Mounting brackets so that pin pull tabs are facing the **LEFT** of the TV.

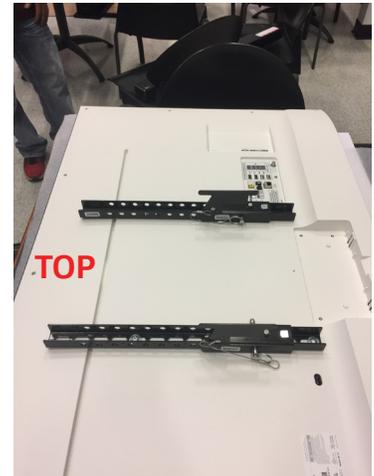

2I. Line up the bracket hook position to HOLE 12 (3rd hole from the bottom).



2J. Position the hook pin hole over the proper hole and making sure both hooks are in the same position.



2K. Push the locking tab into place.



2L. Making sure the ball bearing will click fully through the hole.



2M. Locate the power outlet for the UHD TV - Target DPCI 3050.



2N. Plug the power cable in place.



2O. Lift the TV so that it can be mounted on the spanner bar installed earlier.



2P. Carefully slide the brackets onto the spanner bar the TV will sit at an angle.



2Q. Upper TV Installation complete.



3. Install the OLED TV Header

3A. Locate the (1) Top back panel.



3B. Install the top hook of the back panel onto the Notch 52 (from the bottom).



3C. Locate the (1) Standard Price Bar Target DPCI 004388794



3D. Install the top hook of the price bar onto Notch 54 (from the bottom)/



3E. Make sure price bar overlaps the back panel as shown below:



3F. Install the (1) Target Price insert onto the price bar, making sure it lines up to the left side.



3G. Locate the (1) Spanner bar for OLED header.



3H. Install the top hooks of the OLED header spanner bar onto Notch 48 (from the bottom).



3I. Locate (2) spanner locking brackets (2) Pan Phillips machine screw #10 - 24x1/2" and (2) Hex kep nuts #10 - 24



3J. Tighten the locking brackets in place on both sides.



3K. Installation of the OLED TV Header is complete.




4. Install Lower spanner bars and sub woofer platform

4A. Locate the (1) Target TV spanner bar for OLED TV Target DPCI AX3050. Install the top hooks onto Notch 30 (from the bottom).



4B. Locate the (1) Media Shelf spanner bar. Install the top hooks onto Notch 19 (from the bottom).

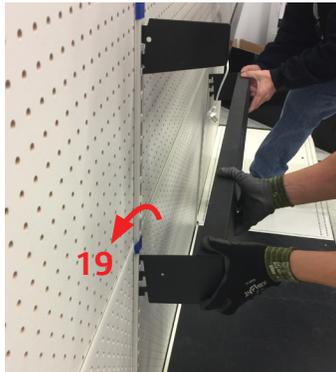

4C. Locate and install the (1) Base cover so that the 3 holes line up with the top right corner.




4D. Locate (4) Xmas Tree Clips for securing the base cover.



4E. Install the (4) Xmas Tree Clips onto the 4 outer corners of the base cover.



4F. Locate the (1) Sub woofer mounting plate and position it over the remaining top right holes on the base cover. Make sure the mounting plate has the screw holes facing up.

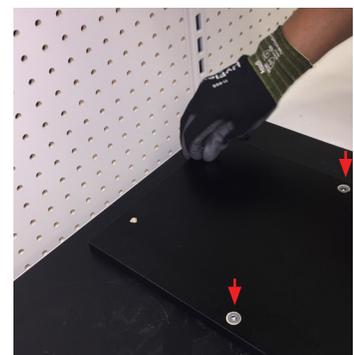

4G. Locate (2) Pan Phillips Machine Screws #10 - 24x1" & (2) Wing Nuts #10-24



4H. Tighten the wing nuts so that the sub woofer base is secure.



4H. Set aside base plate for reinstallation later.



5. Install the Media Shelf

5A. Locate the (1) sound bar shelf and (4) Pan head tapping screws type AB #6 x 1/2" Phillips.



5B. Screw the (4) pan head tapping screw into the bottom the media shelf so that the sound bar shelf is secure.



5C. Position the Media shelf so that it is upright.



5D. On the back of the media shelf. Feed the cables through the bottom grommet hole on the left side of the shelf.



5E. Repeat this process for the Right side feeding the cables through the right side grommet hole.



5F. Make sure all cables are clear from the back of the unit as this area will become pinched by the spanner bar.



5G. Install the (1) Media shelf onto the media shelf spanner bar. **BE CAREFUL** and keep fingers clear of the back of the shelf as they may become pinched.



5H. Place all the cables towards the base opening for now.



5I. Loop (1) HDMI Cable from the media center onto the OLED TV Spanner bar.



5J. Loop (1) Power extension cable onto the OLED TV Spanner bar.



5K. Plug the Power cable of the Upper UHD TV into the Power cable extension.




5L. Plug the Media Center's Power Brick into Target's Gondola Power extension cable.




5M. Pull and organize and excess cables so that there isn't too much slack.



5N. Reinstall the Base Plate cover.

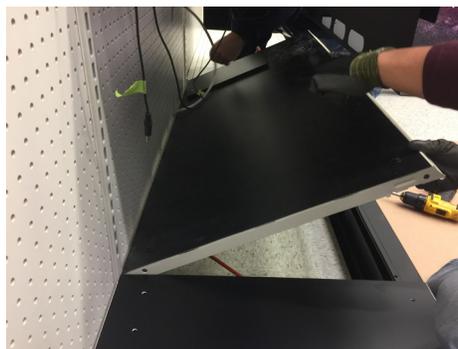


5O. Install a cable twist tie onto the gondola wall to organize cable going into the base.

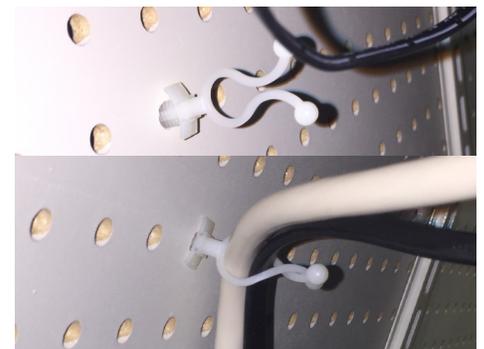

6. Install Sub woofer

6A. Locate the (1) Sub woofer and (1) Sub woofer Security Bracket and (2) Pan Phillips machine screws #10 - 24 x 1/2"

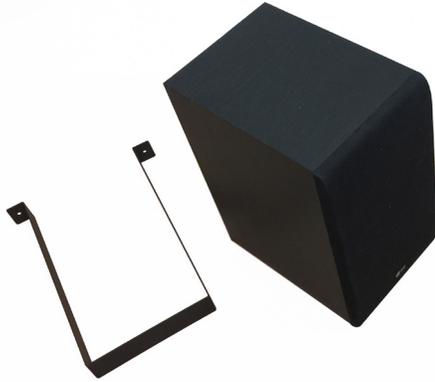

6D. Place the security bracket on top of the Sub woofer.



6B. Place the Sub woofer onto the sub woofer platform installed earlier.



6E. Align the security bracket with the screw holes of the platform.



6C. Make sure the sub woofer is aligned evenly on the platform.



6F. Screw (2) pan machine screws to secure the security bracket and sub woofer. Plug the sub woofer into the media center power outlet.



7. Install Lower Back Panel.

7A. Locate (1) Lower back panel and install it onto the OLED TV Spanner bar, **BE CAREFUL** not to pinch fingers.



7B. Organize cables so that (1) HDMI Cable is prepared for the Lower TV.




7C. The Media Shelf should be 32" from the floor to the top of the shelf.



8. Install Lower TV

8A. Place (2) TV Mounting brackets so that the screw holes align with the bracket holes.

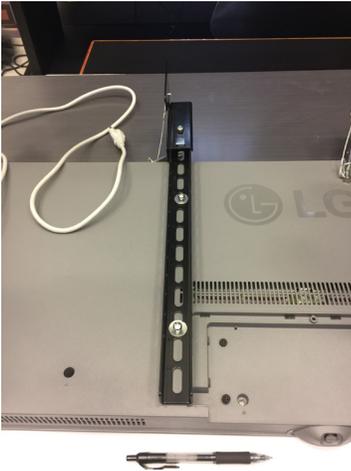

8B. Screw the (4) TV Mount screws and (4) Mount Washers through the bracket and into the TV.



8C. Slide the hook bracket onto HOLE 6 (9 from the bottom) and secure the pins into place.




8D. Carefully lift the TV.



8E. Install the OLED TV -Target DPCI AX3050 onto the OLED TV Spinner bar.



8F. Install the OLED TV Header Panel onto the OLED Header Spinner bar.

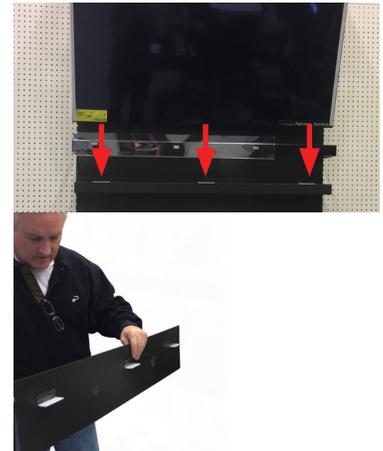

8G. Lower TV Installation complete.



8H. Plug the (1) HDMI Cable into the HDMI IN 1 Port of the Lower TV.



8I. Plug the electrical cable from the LG Header into the adapter.




9. Finishing Installation and Installing Sound bar

9A. Locate (2) Pan Phillips Machine screws 1/4" - 20 x 2.50"



9B. Screw the (2) Machine screws into the Media shelf plate to secure it in place.

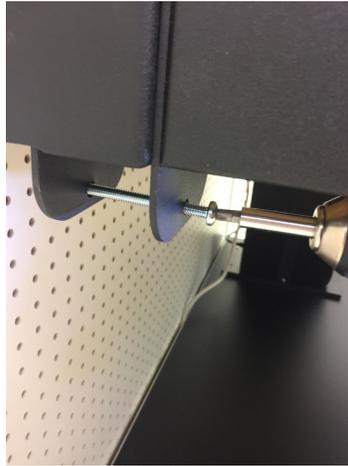

9C. Install the (1) Target Price Insert above the sound bar and place the (1) Sound bar on the shelf.




9D. Locate (2) Pan Phillips machine screws #10 - 24 x 1/2" and secure the Sound bar to the shelf.



9E. Place the Sound bar's power brick into the media shelf storage compartment.



9F. Plug the Power of the power brick into the Media shelf's power outlet.

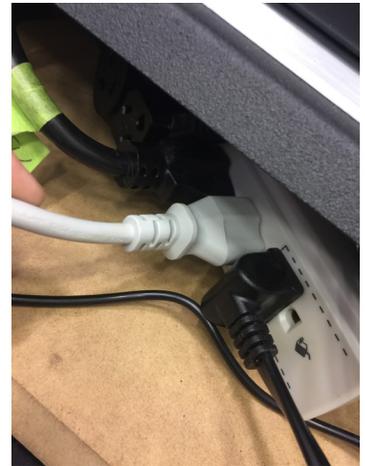


9G. Plug the Power cord into the sound bar, Also plug (1) 3.5mm Audio cable into the sound bar




9H. Close the door to the media shelf.



9I. Assembly of the Sound bar is complete.

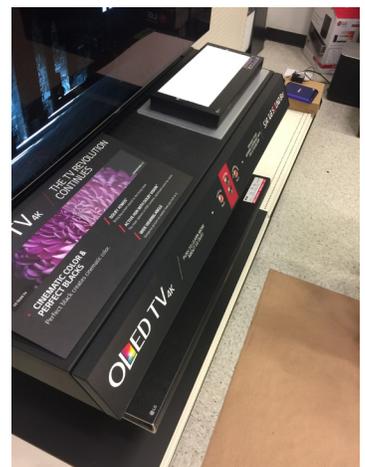

9J. Install the UHD TV Info Panel next to the Price insert above the OLED TV Header.

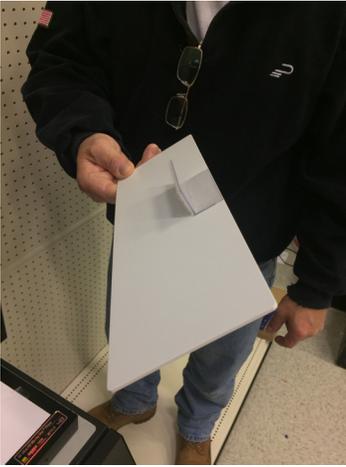


9K. Make sure the Graphic Lines up with the Price insert.



9L. Install Price inserts into the Media shelf Price panels.



9M. Locate (2) spanner locking brackets (2) Pan Phillips machine screw #10 - 24x1/2" and (2) Hex kep nuts #10 - 24 and tighten the bracket securely in place.

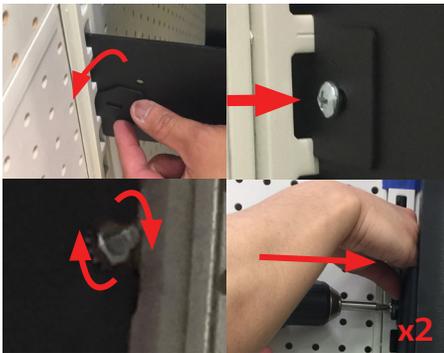

9N. Assembly Complete.



If you have any questions regarding this display, please call: 1-800-826-0626